
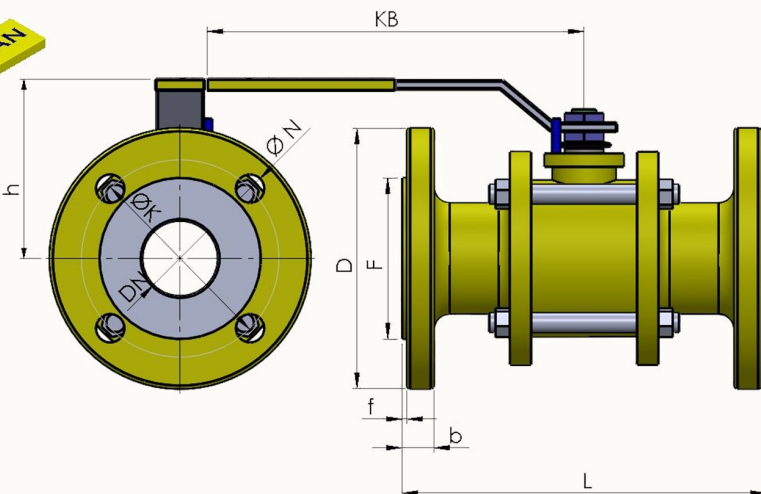


PRODUCT FEATURES

FULL BORE

3 PIECE


ISO 5211 ACTUATOR MOUNTING

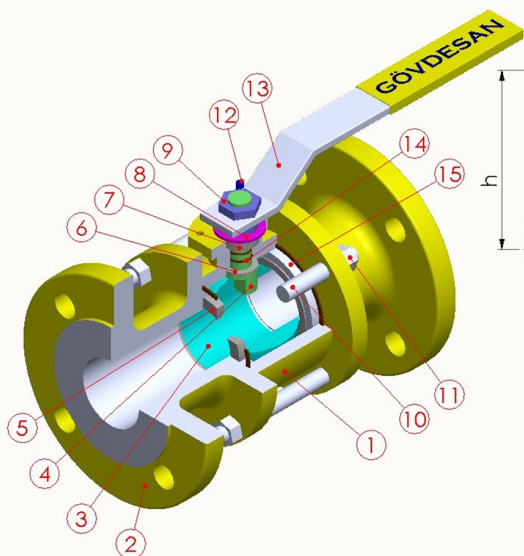

PARTS / MATERIALS

NO	PART NAME	MATERIAL
1	BODY	GS-C25
2	COVER	GS-C25
3	BALL	AISI 420
4	STEM	CK 45 + GAL.
5	BALL SEAL	PTFE-Teflon
6	NECK SEAL	PTFE-Teflon
7	THROAT PRESSURE	PTFE-Teflon
8	BOWL WASHER	Ck 70
9	COUNTER NUT	5.6.
10	STUD BOLT	8.8
11	NUT	8.8
12	STOPPING PIM	St 42
13	HANDLE	St 37
14	SPINDL O-RING	VITON
15	BODY O-RING	VITON

ACTUATOR DRAWING - ISO 5211

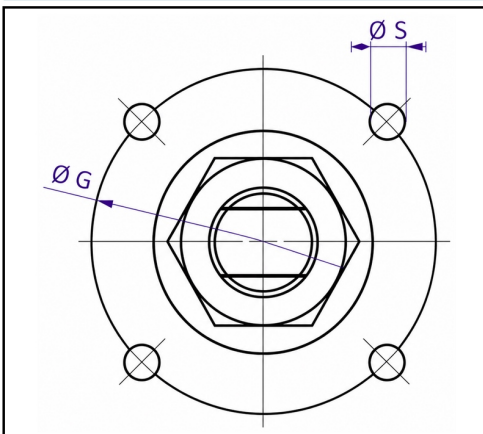

PRODUCT



DIMENSIONS

DN	INCH	L mm	KB mm	h mm	f mm	D mm	b mm	K mm	HOLE adet	N mm	F mm	G mm	S	WEIGHT kg
DN 15	1/2"	130	150	80	2	95	14	65	4	14	45	36	M 5	3
DN 20	3/4"	150	150	85	2	105	16	75	4	14	58	36	M 5	3,4
DN 25	1"	160	185	90	2	115	16	85	4	14	68	42	M 5	4,05
DN 32	1 1/4"	180	240	100	3	140	18	100	4	19	78	42	M 5	6,2
DN 40	1 1/2"	200	280	120	3	150	18	110	4	19	88	50	M 6	8,7
DN 50	2"	230	280	125	3	165	20	125	4	19	102	50	M 6	12,7
DN 65	2 1/2"	290	330	150	3	185	22	145	8	19	122	70	M 8	15,5
DN 80	3"	310	400	160	3	200	24	160	8	19	138	70	M 8	18,85
DN 100	4"	350	460	175	3	235	24	190	8	23	158	102	M 10	38,15
DN 125	5"	400	460	200	3	270	26	220	8	28	188	125	M 12	52,15
DN 150	6"	450	670	265	3	300	28	250	8	28	212	125	M 12	104
DN 200	8"	550	750	325	3	375	34	320	12	31	285	125	M 12	180
DN 250	10"	650	1100	370	3	450	38	385	12	34	345	125	M 12	
DN 300	12"	760	1150	350	4	515	42	450	16	34	410	125	M 12	

DİZAYN

TS EN 331 - TS 9809

FACE TO FACE

EN 558

FLANGE CONNECTION

EN 1092-1

TEST

EN 12266-1

WORKING TEMPERATURE

-20 °C / +180 °C

APPLICATIONS



NATURAL GAS



OIL



LPG



FUEL-OIL



COMPRESSED AIR

CERTIFICATES



0408



TS 9809



TS EN 331



GASBIR-GAZMER



FIRE SAFETY



9001



14001



45001



10002

Dimensions are in mm. Within the relevant standards; we reserve the right to change the design and construction.