
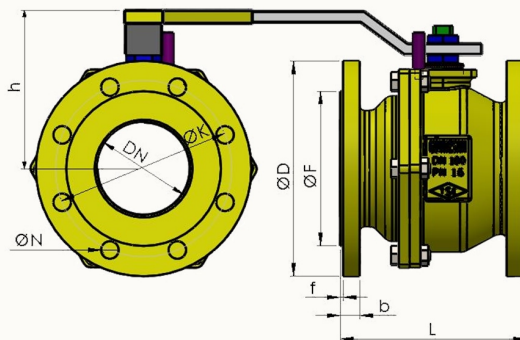


**PRODUCT
FEATURES**

FULL BORE

2 PIECE


ISO 5211 ACTUATOR
MOUNTING

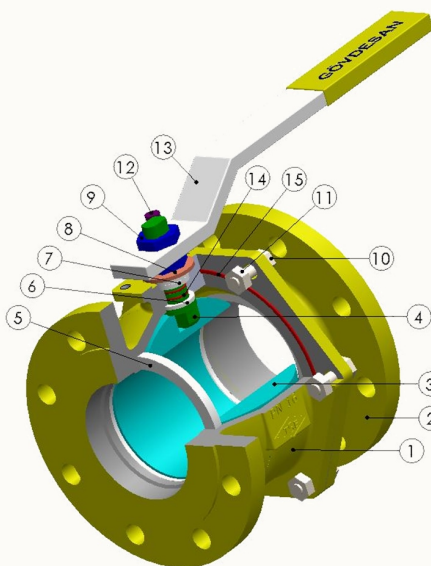

PARTS / MATERIALS

NO	PART NAME	MATERIAL
1	BODY	EN GJS 400-15
2	COVER	EN GJS 400-15
3	BALL	AISI 420
4	STEM	CK 45 + GAL.
5	BALL SEAL	PTFE-Teflon
6	NECK SEAL	PTFE-Teflon
7	THROAT PRESSURE	PTFE-Teflon
8	BOWL WASHER	Ck 70
9	COUNTER NUT	5.6.
10	BOLT	8.8
11	NUT	8.8
12	STOPPING PIM	St 42
13	HANDLE	St 37
14	SPINDL O-RING	VITON
15	BODY O-RING	VITON

ACTUATOR DRAWING - ISO 5211

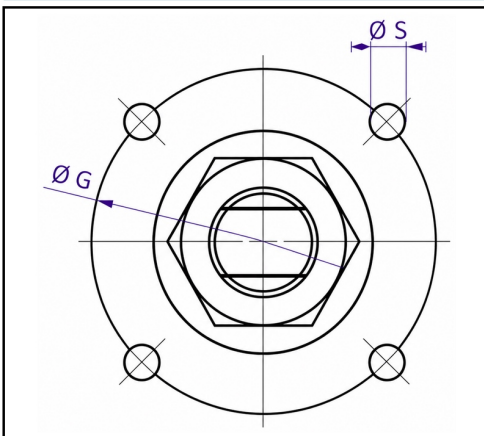

PRODUCT



DIMENSIONS

DN	INCH	L mm	KB mm	h mm	f mm	D mm	b mm	K mm	HOLE adet	N mm	F mm	G mm	S	WEIGHT kg
DN 15	1/2"	115	150	80	2	95	14	65	4	14	46	36	M 5	2,4
DN 20	3/4"	120	150	85	2	105	16	75	4	14	56	36	M 5	2,9
DN 25	1"	125	185	90	3	115	16	85	4	14	65	42	M 5	3,9
DN 32	1 1/4"	130	240	100	3	140	18	100	4	19	76	42	M 5	5,25
DN 40	1 1/2"	140	280	120	3	150	18	110	4	19	84	50	M 6	8,45
DN 50	2"	150	280	125	3	165	20	125	4	19	99	50	M 6	7,95
DN 65	2 1/2"	170	330	150	3	185	20	145	4	19	118	70	M 8	11,1
DN 80	3"	180	400	160	3	200	22	160	8	19	132	70	M 8	16,3
DN 100	4"	190	460	175	3	220	24	180	8	19	156	102	M 10	20,3
DN 125	5"	325	460	200	3	250	26	210	8	19	184	125	M 12	32,45
DN 150	6"	350	670	265	3	285	26	240	8	23	211	125	M 12	50,5
DN 200	8"	400	750	325	4	340	26	295	12	23	266	125	M 12	97,4
DN 250	10"	450	750	390	4	400	29	355	12	26	319	125	M 12	107
DN 300	12"	500	750	470	4	455	32	410	12	26	370	125	M 12	162,5

DİZAYN

TS EN 331 - TS 9809

FACE TO FACE

EN 558

FLANGE CONNECTION

EN 1092-2

TEST

EN 12266-1

WORKING TEMPERATURE

-20 °C / +180 °C

APPLICATIONS



NATURAL GAS



OIL



LPG



FUEL-OIL



COMPRESSED AIR

CERTIFICATES



Dimensions are in mm. Within the relevant standards; we reserve the right to change the design and construction.