


PRODUCT FEATURES

BSPP THREADED CONNECTION

3 PIECE


ISO 5211 ACTUATOR MOUNTING

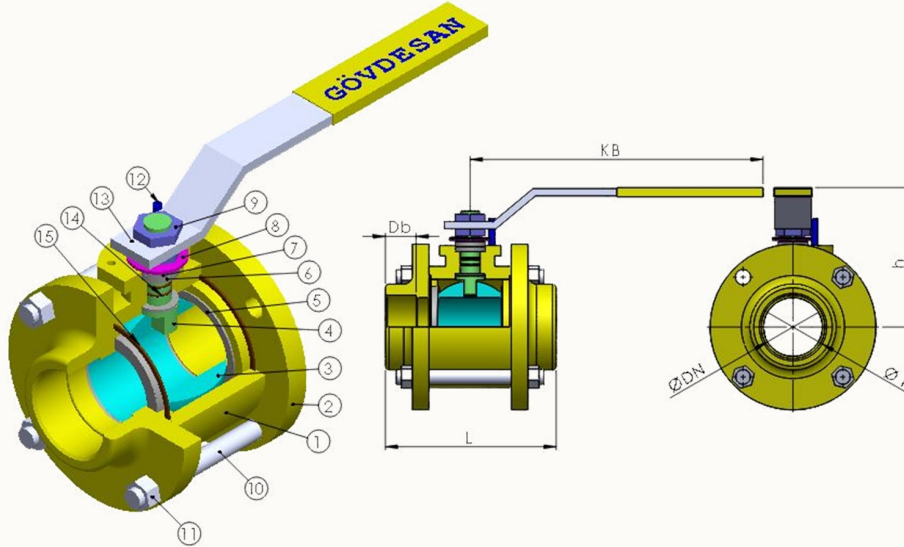

PARTS / MATERIALS

NO	PART NAME	MATERIAL
1	BODY	EN GJS 400-15
2	COVER	EN GJS 400-15
3	BALL	AISI 420
4	STEM	CK 45 + GAL.
5	BALL SEAL	PTFE-Teflon
6	NECK SEAL	PTFE-Teflon
7	THROAT PRESSURE	PTFE-Teflon
8	BOWL WASHER	Ck 70
9	COUNTER NUT	5.6.
10	STUD BOLT	8.8
11	NUT	8.8
12	STOPPING PIM	St 42
13	HANDLE	St 37
14	SPINDL O-RING	VITON
15	BODY O-RING	VITON

ACTUATOR DRAWING - ISO 5211

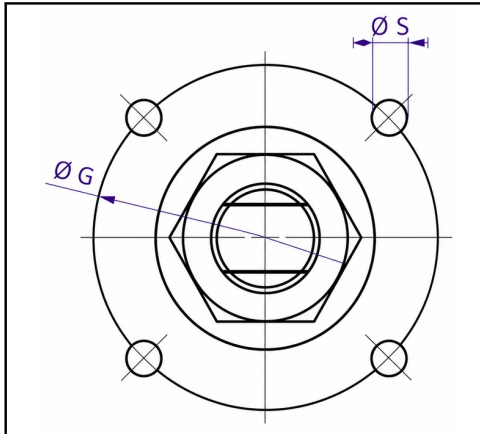

PRODUCT



DIMENSIONS

DN	INCH	L mm	KB mm	h mm	R inch	d mm	Db mm	G mm	S	WEIGHT kg
DN 15	1/2"	75	150	80	1/2"	15	16	36	M 5	0,9
DN 20	3/4"	80	150	85	3/4"	20	16	36	M 5	1,3
DN 25	1"	90	185	90	1"	25	20	42	M 5	1,65
DN 32	1 1/4"	110	240	100	1 1/4"	32	22	42	M 5	2,7
DN 40	1 1/2"	120	280	120	1 1/2"	40	22	50	M 6	3,95
DN 50	2"	140	280	125	2"	50	25	50	M 6	5,5
DN 65	2 1/2"	170	330	150	2 1/2"	65	30	70	M 8	10,2
DN 80	3"	195	400	160	3"	80	30	70	M 8	15
DN 100	4"	230	460	175	4"	100	35	102	M 10	

DİZAYN

TS EN 331

ALINDAN ALINA

EN 16722

DİŞLİ BAĞLANTISI

EN 10226-1

TEST

EN 12266-1

WORKING TEMPERATURE

-20 °C / +180 °C

APPLICATIONS



NATURAL GAS



OIL



LPG



FUEL-OIL



COMPRESSED AIR

CERTIFICATES



Dimensions are in mm. Within the relevant standards; we reserve the right to change the design and construction.