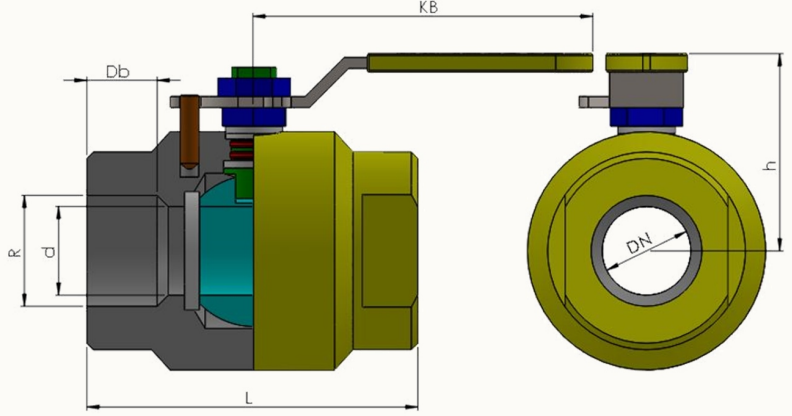
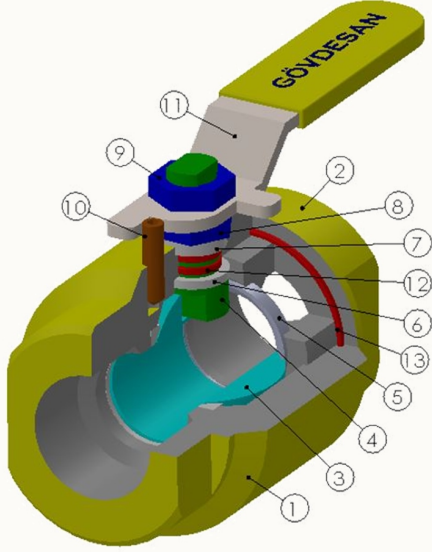


ÜRÜN ÖZELLİKLERİ
NPT DIŞLİ BAĞLANTI
TAM GEÇİŞLİ
3 PARÇALI

PARÇA / MALZEME

NO	PARÇA ADI	MALZEME
1	GÖVDE	GS-C25
2	KAPAK	GS-C25
3	KÜRE	AISI 420
4	MİL	CK 45 + GAL.
5	KÜRE CONTA	PTFE-Teflon
6	BOĞAZ CONTA	PTFE-Teflon
7	BOĞAZ BASKI	PTFE-Teflon
8	ÇANAK PUL	Ck 70
9	KONTRA SOMUN	5.6.
10	SAPLAMA	8.8
11	SOMUN	8.8
12	STOPLAMA PİMİ	St 42
13	KOL	St 37
14	MİL O-RİNG	VİTON
15	GÖVDE O-RİNG	VİTON

ÜRÜN RESMİ

ÖLÇÜLER

DN	INCH	L mm	KB mm	h mm	R inch	d mm	Db mm	AĞIRLIK kg
DN 15	1/2"	75	125	55	1/2"	15	16	0,85
DN 20	3/4"	80	125	60	3/4"	20	16	1,4
DN 25	1"	90	135	80	1"	25	20	1,55

DİZAYN API 6D	ALINDAN ALINA ASME B16.10	DIŞLİ BAĞLANTISI EN 10226-1	TEST EN 12266-1	ÇALIŞMA SICAKLIĞI -20 °C / +180 °C
-------------------------	-------------------------------------	---------------------------------------	---------------------------	--

KULLANIM ALANLARI

 DOĞALGAZ	 PETROL	 LPG	 FUEL-OIL	 BASINÇLI HAVA
---	--	---	---	---

SERTİFİKALAR


Ölçüler mm'dir. İlgili standartlar dahilinde; dizayn ve konstrüksiyon değiştirme hakkımız mahfuzdur.