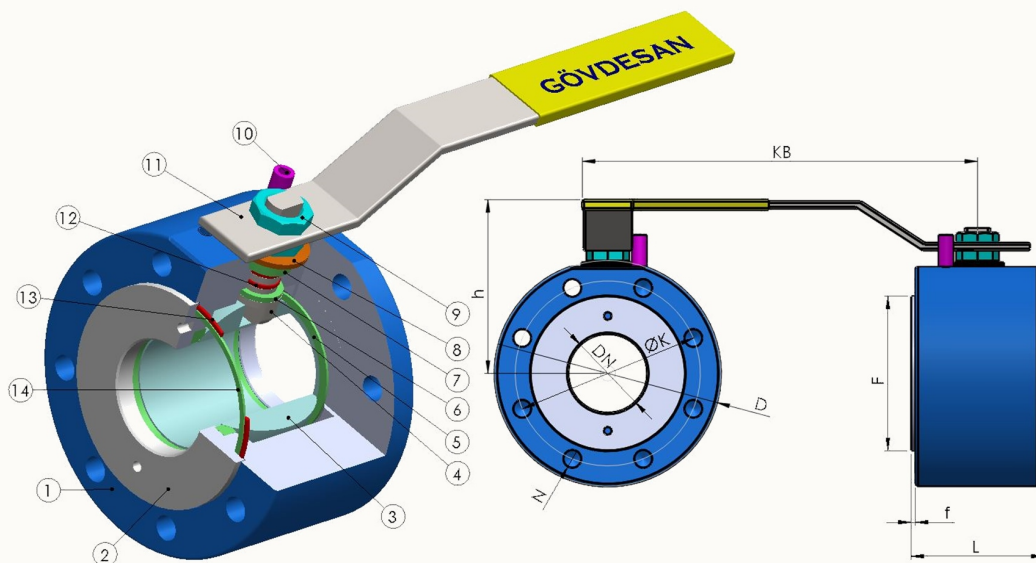
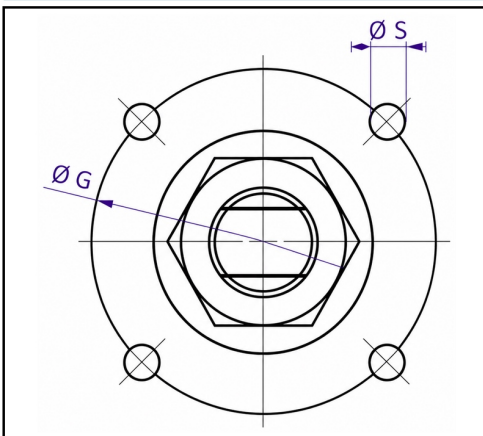


**PRODUCT
FEATURES**
FULL BORE
FLANGED CONNECTION
**ISO 5211 ACTUATOR
MOUNTING**

PARTS / MATERIALS

NO	PART NAME	MATERIAL
1	BODY	GS-C25
2	COVER	GS-C25
3	BALL	AISI 420
4	STEM	CK 45 + GAL.
5	BALL SEAL	PTFE-Teflon
6	NECK SEAL	PTFE-Teflon
7	THROAT PRESSURE	PTFE-Teflon
8	BOWL WASHER	Ck 70
9	COUNTER NUT	5.6.
10	STOPPING PIM	St 42
11	HANDLE	St 37
12	SPINDL O-RING	VITON
13	BODY O-RING	VITON
14	BODY GASKET	PTFE-Teflon

ACTUATOR DRAWING - ISO 5211

PRODUCT

DIMENSIONS

DN	INCH	L mm	KB mm	h mm	f mm	D mm	b mm	K mm	HOLE adet	N Metrik	F mm	G mm	S	WEIGHT kg
DN 15	1/2"	39	150	80	2	88	14	65	4	M 12	46	36	M 5	1,45
DN 20	3/4"	42	150	85	2	98	16	75	4	M 12	56	36	M 5	1,95
DN 25	1"	47	180	90	2	109	16	85	4	M 12	65	42	M 5	2,8
DN 32	1 1/4"	58	230	100	2	135	18	100	4	M 16	76	42	M 5	5,25
DN 40	1 1/2"	65	275	120	3	145	18	110	4	M 16	84	50	M 6	6,75
DN 50	2"	84	275	125	3	165	20	125	4	M 16	99	50	M 6	10,1
DN 65	2 1/2"	105	320	150	3	177	20	145	4	M 16	118	70	M 8	17,4
DN 80	3"	120	380	160	3	197	22	160	8	M 16	132	70	M 8	20,8
DN 100	4"	150	450	175	3	232	24	180	8	M 16	156	102	M 10	37,8
DN 125	5"	200	450	200	3	270	26	210	8	M 16	184	125	M 12	66
DN 150	6"	235	650	235	3	305	26	240	8	M 20	211	125	M 12	96
DN 200	8"	310	900	270	3	400	26	295	12	M 20	266	125	M 12	215

DİZAYN
TS 3148, EN ISO 17292
FACE TO FACE
EN 558
FLANGE CONNECTION
EN 1092-1
TEST
EN 12266-1
WORKING TEMPERATURE
-20 °C / +180 °C
APPLICATIONS

OIL

LPG

FUEL-OIL

COMPRESSED AIR
CHEMICAL SERVICE
INDUSTRIAL APPLICATIONS
CERTIFICATES

0408

TS 3148

FIRE SAFETY

9001

14001

45001

10002

Dimensions are in mm. Within the relevant standards; we reserve the right to change the design and construction.