


**PRODUCT
FEATURES**

FULL BORE

FLANGED CONNECTION


ISO 5211 ACTUATOR
MOUNTING

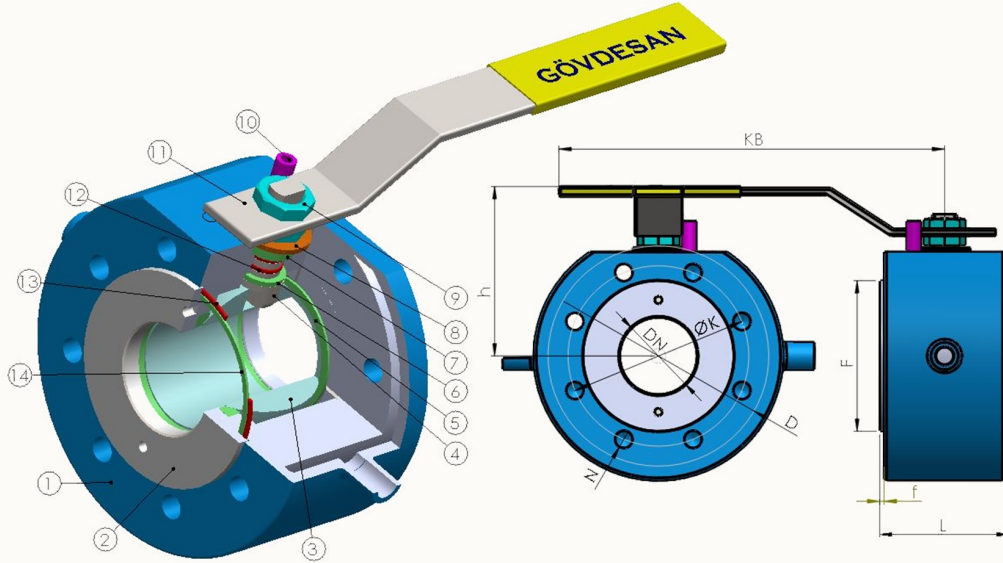


PARTS / MATERIALS

NO	PART NAME	MATERIAL
1	BODY	GS-C25
2	COVER	GS-C25
3	BALL	AISI 420
4	STEM	CK 45 + GAL.
5	BALL SEAL	PTFE+Carbon
6	NECK SEAL	PTFE+Carbon
7	THROAT PRESSURE	PTFE+Carbon
8	BOWL WASHER	Ck 70
9	COUNTER NUT	5.6.
10	STOPPING PIM	St 42
11	HANDLE	St 37
12	SPINDL O-RING	VITON
13	BODY O-RING	VITON
14	BODY GASKET	PTFE+Carbon
15	MUFF	ST 42

ACTUATOR DRAWING - ISO 5211

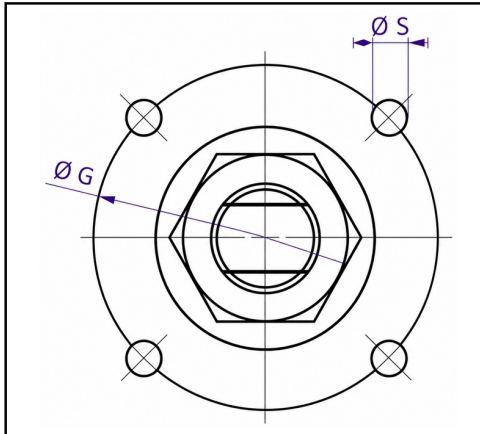

PRODUCT

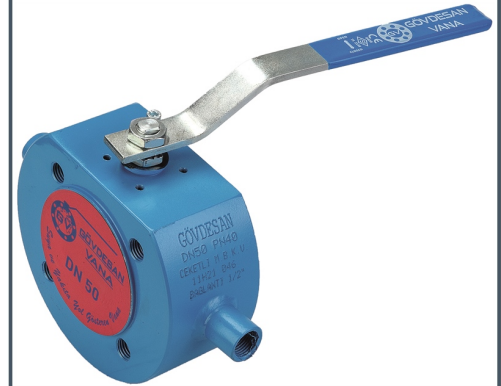

DIMENSIONS

DN	INCH	L mm	KB mm	h mm	f mm	D mm	K mm	HOLE adet	N Metrik	F mm	R inch	G mm	S	WEIGHT kg
DN 15	1/2"	39	150	80	2	88	65	4	M 12	46	1/2"	36	M 5	1,6
DN 20	3/4"	42	150	85	2	98	75	4	M 12	56	1/2"	36	M 5	2,15
DN 25	1"	47	180	90	2	109	85	4	M 12	65	1/2"	42	M 5	3,1
DN 32	1 1/4"	58	230	100	2	135	100	4	M 16	76	1/2"	42	M 5	5,8
DN 40	1 1/2"	65	275	120	3	145	110	4	M 16	84	1/2"	50	M 6	7,4
DN 50	2"	84	275	125	3	165	125	4	M 16	99	1/2"	50	M 6	11,1
DN 65	2 1/2"	105	320	150	3	177	145	8	M 16	118	1/2"	70	M 8	19,15
DN 80	3"	120	380	160	3	197	160	8	M 16	132	1"	70	M 8	22,8
DN 100	4"	150	450	175	3	232	190	8	M 20	156	1"	102	M 10	41,5
DN 125	5"	200	450	200	3	270	220	8	M 20	184	1"	125	M 12	72,6
DN 150	6"	235	650	235	3	305	250	8	M 22	211	1"	125	M 12	105,6
DN 200	8"	310	900	270	3	400	320	12	M 27	266	1"	125	M 12	236,5

DİZAYN

TS 3148, EN ISO 17292

FACE TO FACE

EN 558

FLANGE CONNECTION

EN 1092-1

TEST

EN 12266-1

ÇALIŞMA SICAKLIĞI

-20 °C / +200 °C

APPLICATIONS



OIL

CHEMICAL SERVICE



ASPHALT



WATER

HOT WATER

INDUSTRIAL APPLICATIONS

CERTIFICATES



Dimensions are in mm. Within the relevant standards; we reserve the right to change the design and construction.