


PRODUCT FEATURES

FULL BORE

FLANGED CONNECTION


ISO 5211 ACTUATOR MOUNTING

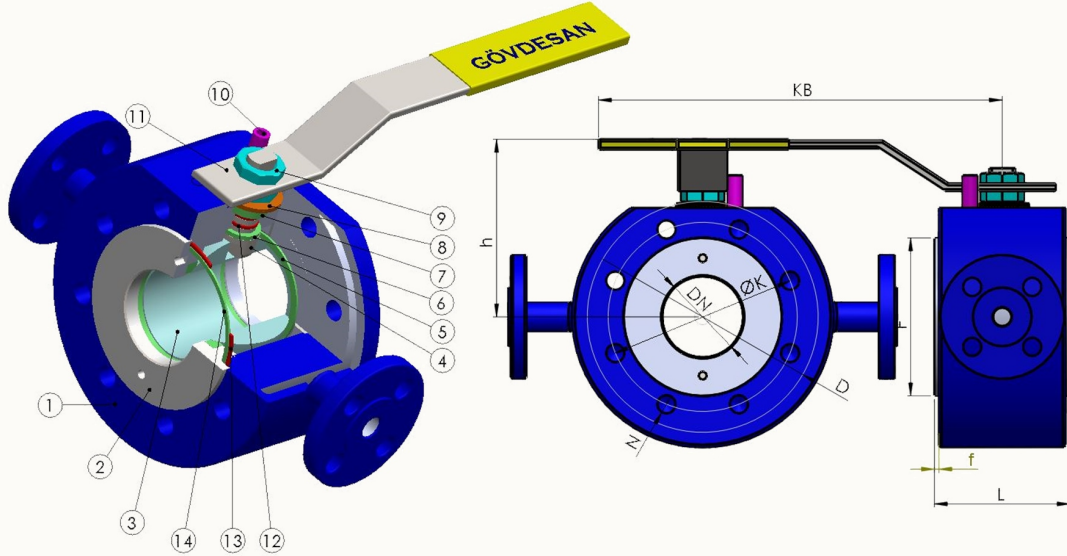

PARTS / MATERIALS

NO	PART NAME	MATERIAL
1	BODY	GS-C25
2	COVER	GS-C25
3	BALL	AISI 420
4	STEM	CK 45 + GAL.
5	BALL SEAL	PTFE+Carbon
6	NECK SEAL	PTFE+Carbon
7	THROAT PRESSURE	PTFE+Carbon
8	BOWL WASHER	CK 70
9	COUNTER NUT	5.6.
10	STOPPING PIM	St 42
11	HANDLE	St 37
12	SPINDL O-RING	VITON
13	BODY O-RING	VITON
14	BODY GASKET	PTFE+Carbon
15	JACKET FLANGE	CK 45

ACTUATOR DRAWING - ISO 5211

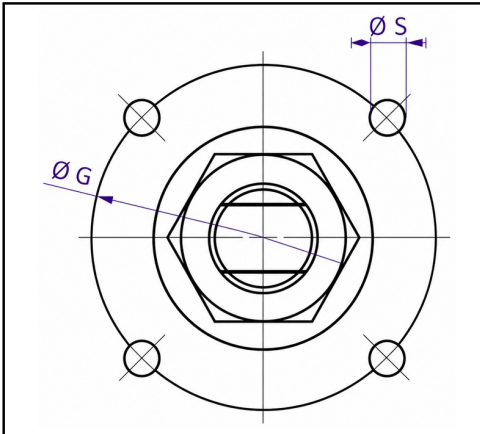

PRODUCT



DIMENSIONS

DN	INCH	L mm	KB mm	h mm	f mm	D mm	b mm	K mm	HOLE adet	N Metrik	F mm	R mm	G mm	S	WEIGHT kg
DN 50	2"	84	275	125	3	165	20	125	4	M 16	99	DN 25	50	M 6	11,1
DN 65	2 1/2"	105	320	150	3	177	20	145	4	M 16	118	DN 25	70	M 8	19,15
DN 80	3"	120	380	160	3	197	22	160	8	M 16	132	DN 25	70	M 8	22,8
DN 100	4"	150	450	175	3	232	24	180	8	M 16	156	DN 25	102	M 10	41,5
DN 125	5"	200	450	200	3	270	26	210	8	M 16	184	DN 25	125	M 12	72,6
DN 150	6"	235	650	235	3	305	26	240	8	M 20	211	DN 25	125	M 12	105,6
DN 200	8"	310	900	270	3	400	26	295	12	M 20	266	DN 25	125	M 12	236,5

DİZAYN

TS 3148, EN ISO 17292

FACE TO FACE

EN 558

FLANGE CONNECTION

EN 1092-1

TEST

EN 12266-1

ÇALIŞMA SICAKLIĞI

-20 °C / +200 °C

APPLICATIONS



OIL

CHEMICAL SERVICE



ASPHALT



WATER

HOT WATER

INDUSTRIAL APPLICATIONS

CERTIFICATES



Dimensions are in mm. Within the relevant standards; we reserve the right to change the design and construction.