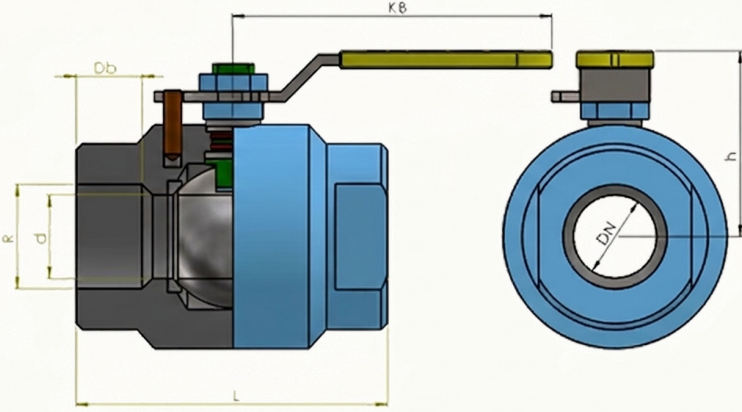
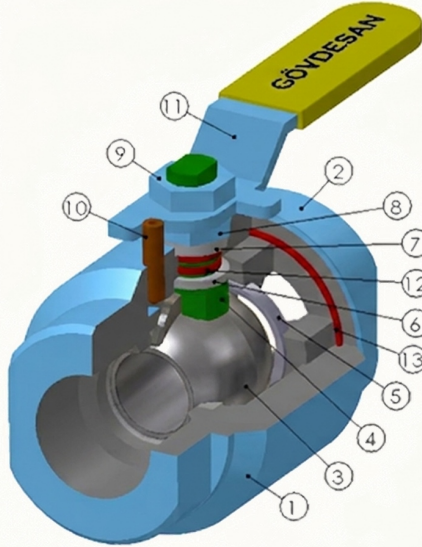


**PRODUCT
FEATURES**
**BSPP THREADED
CONNECTION**
FULL BORE
2 PIECE

PARTS / MATERIALS

NO	PART NAME	MATERIAL
1	BODY	GS-C25
2	COVER	GS-C25
3	BALL	AISI 420
4	STEM	CK 45 + GAL.
5	BALL SEAL	PTFE-Teflon
6	NECK SEAL	PTFE-Teflon
7	THROAT PRESSURE	PTFE-Teflon
8	BOWL WASHER	Ck 70
9	COUNTER NUT	5.6.
10	STUD BOLT	8.8
11	NUT	8.8
12	STOPPING PIM	St 42
13	HANDLE	St 37
14	SPINDL O-RING	VITON
15	BODY O-RING	VITON

PRODUCT

DIMENSIONS

DN	INCH	L mm	KB mm	h mm	R inch	d mm	Db mm	WEIGHT kg
DN 15	1/2"	75	125	55	1/2"	15	16	0,85
DN 20	3/4"	80	125	60	3/4"	20	16	1,4
DN 25	1"	90	135	80	1"	25	20	1,55

DESIGN
API 6D
FACE TO FACE
ASME B16.10
DIŞLI BAĞLANTISI
EN 10226-1
TEST
EN 12266-1
WORKING TEMPERATURE
-20 °C / +180 °C
APPLICATIONS

WATER
HOT WATER

COMPRESSED AIR
INDUSTRIAL APPLICATIONS
CERTIFICATES


Dimensions are in mm. Within the relevant standards; we reserve the right to change the design and construction.