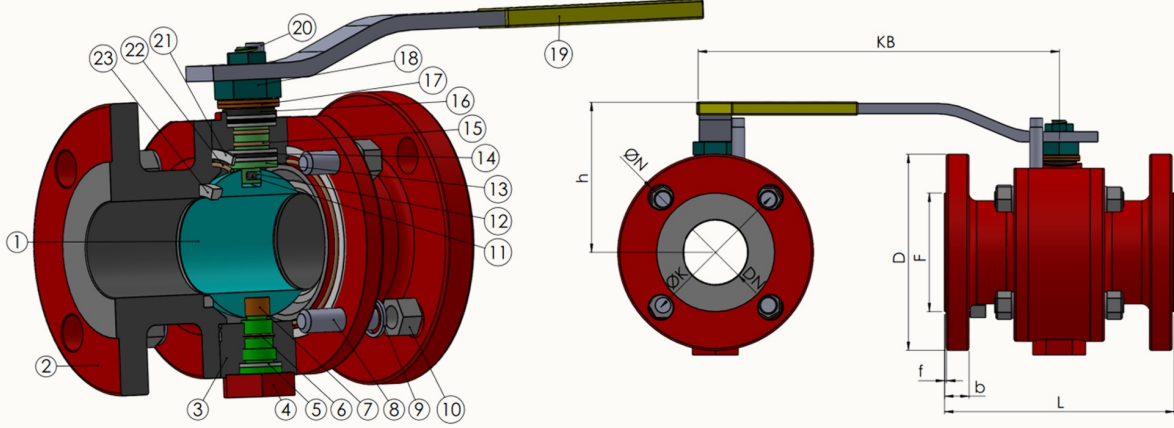
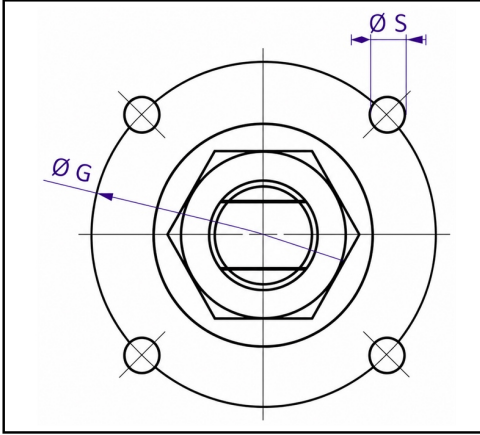


ÜRÜN ÖZELLİKLERİ
TAM GEÇİŞLİ
FIRE SAFE
ISO 5211 AKTÜATÖR BAĞLANTISI

PARÇA / MALZEME
AKTÜATÖR BAĞLANTI ÇİZİMİ - ISO 5211
ÜRÜN RESMİ

NO	PARÇA ADI	MALZEME
1	KÜRE	AISI 420
2	KAPAK	A105 /A216 WCB
3	GÖVDE	A105 /A216 WCB
4	TRUNNION	ASTM A 105
5	BOĞAZ CONTA	PTFE-Teflon
6	TRUNNION O-RING	VITON
7	TRUNNION YATAK	PTFE-Teflon
8	SAPLAMA	Gr.B7
9	YAYLI RONDELA	C67S
10	SOMUN	Gr.2H
11	ANTİSTATİK YAY	AISI 304
12	ANTİSTATİK KÜRE	AISI 304
13	MİL	AISI 420
14	BOĞAZ CONTA	PTFE-KARBON
15	MİL O-RING	VITON
16	BOĞAZ BASKI	C45+Galvaniz
17	ÇANAK PUL	Ck 70
18	KONTRA SOMUN	5.6.
19	KOL	St 37
20	STOPLAMA PİMİ	St 42
21	GÖVDE TEFLON	PTFE-Teflon
22	GÖVDE O-RING	VITON
23	KÜRE CONTA	PTFE-Teflon


ÖLÇÜLER

DN	INCH	L mm	KB mm	h mm	f mm	D mm	b mm	K mm	HOLE adet	N mm	F mm	G mm	S	AĞIRLIK kg
DN 15	1/2"	140	150	83	1,5	95	14,2	66,5	4	15,8	35,1	36	M5	
DN 20	3/4"	152	150	94	1,5	117	15,7	82,6	4	19,1	42,9	36	M5	
DN 25	1"	165	185	98	1,5	124	17,2	88,9	4	19,1	50,8	42	M5	
DN 32	1 1/4"	178	240	108	1,5	133	19	98,6	4	19,1	63,5	42	M5	
DN 40	1 1/2"	190	280	127	1,5	155	20,6	114,3	4	22,3	73	50	M6	
DN 50	2"	216	280	132	1,5	165	22,4	127	8	19,1	91,9	50	M6	
DN 65	2 1/2"	241	330	156	1,5	190	25,4	149,4	8	22,3	104,6	70	M8	
DN 80	3"	282	400	170	1,5	210	28,4	168,1	8	22,3	127	70	M8	
DN 100	4"	305	460	196	1,5	254	31,8	200,2	8	22,3	157,2	102	M10	
DN 125	5"	381	460	212	1,5	279	35,1	235	8	22,3	185,7	125	M12	
DN 150	6"	403	670	286	1,5	318	36,6	269,7	12	22,3	215,9	125	M12	
DN 200	8"	502	750	345	1,5	381	41,1	330,2	12	25,4	269,7	125	M12	
DN 250	10"	568	750	410	1,5	444	47,8	387,4	16	28,5	323,8	125	M12	
DN 300	12"	648	750	490	1,5	521	50,8	450,8	16	31,7	381	125	M12	

DİZAYN
ALINDAN ALINA
FLANŞ BAĞLANTISI
TEST
ÇALIŞMA SICAKLIĞI
API 6D 25. ED.
ASME B16.10
ASME B16.5
API 6D 25. ED.
-29 °C / +180 °C
KULLANIM ALANLARI
 **PETROL**
 **LPG**
 **DOĞALGAZ**
 **FUEL-OIL**
 **ENDÜSTRİYEL UYGULAMALAR**
SERTİFİKALAR


Ölçüler mm'dir. İlgili standartlar dahilinde; dizayn ve konstrüksiyon değiştirme hakkımız mahfuzdur.