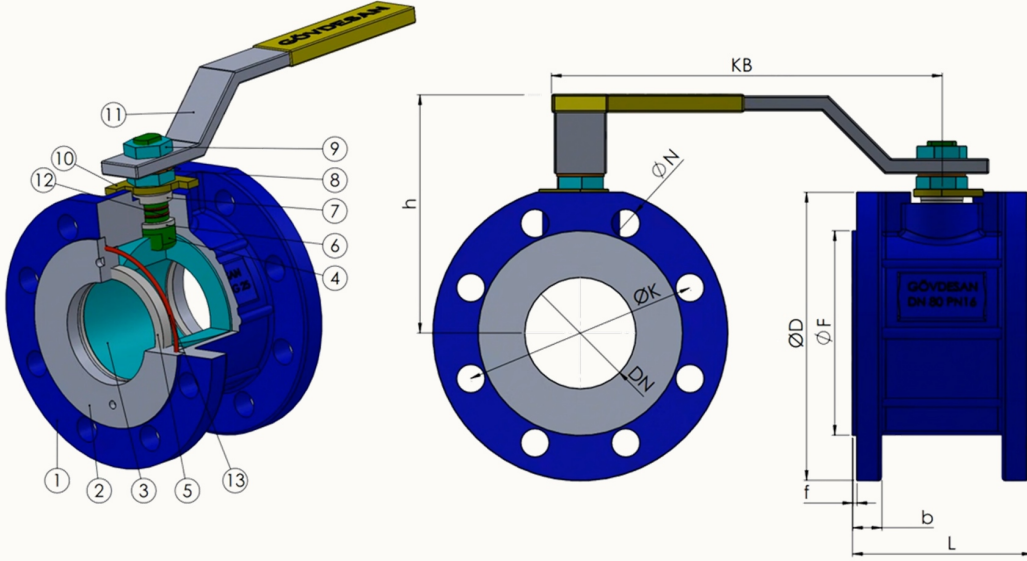


ÜRÜN ÖZELLİKLERİ
TAM GEÇİŞLİ
NİKEL KAPLAMA KÜRE

PARÇA / MALZEME

NO	PARÇA ADI	MALZEME
1	GÖVDE	EN GJL 250
2	KAPAK	EN GJL 250
3	KÜRE	GGG40+Cr+ENP
4	MİL	CK 45 + GAL.
5	KÜRE CONTA	PTFE-Teflon
6	BOĞAZ CONTA	PTFE-Teflon
7	BOĞAZ BASKI	PTFE-Teflon
8	PUL	Ck 70
9	KONTRA SOMUN	5.6.
10	STOPLAMA LAMASI	St 42
11	KOL	St 37
12	MİL O-RİNG	NBR 70
13	GÖVDE O-RİNG	NBR 70

ÜRÜN RESMİ

ÖLÇÜLER

DN	INCH	L mm	KB mm	h mm	f mm	D mm	b mm	K mm	HOLE adet	N mm	F mm	AĞIRLIK kg
DN 15	1/2"	90	150	80	2	95	14	65	4	14	46	
DN 20	3/4"	95	150	85	2	105	16	75	4	14	56	
DN 25	1"	100	185	90	3	115	16	85	4	14	65	
DN 32	1 1/4"	105	240	100	3	140	18	100	4	19	76	
DN 40	1 1/2"	115	280	120	3	150	18	110	4	19	84	
DN 50	2"	125	280	125	3	165	20	125	4	19	99	
DN 65	2 1/2"	145	330	150	3	185	20	145	4	19	118	
DN 80	3"	155	400	160	3	200	22	160	8	19	132	
DN 100	4"	175	460	175	3	220	24	180	8	19	156	
DN 125	5"	200	460	200	3	250	26	210	8	19	184	
DN 150	6"	225	670	265	3	285	26	240	8	23	211	
DN 200	8"	275	750	325	4	340	26	295	12	23	266	
DN 250	10"	325	750	390	4	400	29	355	12	26	319	
DN 300	12"	375	750	470	4	455	32	410	12	26	370	

DİZAYN TS 3148	ALINDAN ALINA EN 558	FLANŞ BAĞLANTISI EN 1092-2	TEST EN 12266-1	ÇALIŞMA SICAKLIĞI -20 °C / +180 °C
--------------------------	--------------------------------	--------------------------------------	---------------------------	--

KULLANIM ALANLARI

SU
SICAK SU

BASINÇLI HAVA

ENDÜSTRİYEL UYGULAMALAR
SERTİFİKALAR


Ölçüler mm'dir. İlgili standartlar dahilinde; dizayn ve konstrüksiyon değiştirme hakkımız mahfuzdur.