


PRODUCT FEATURES

FULL BORE

NICKEL PLATED BALL

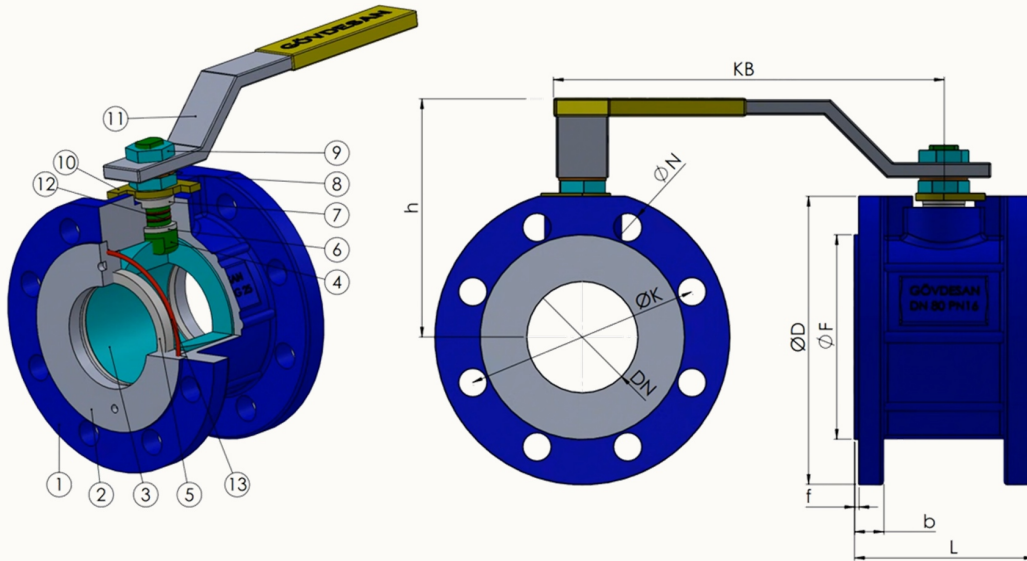

PARTS / MATERIALS

NO	PART NAME	MATERIAL
1	BODY	EN GJL 250
2	COVER	EN GJL 250
3	BALL	GGG40+Cr+ENP
4	STEM	CK 45 + GAL.
5	BALL SEAL	PTFE-Teflon
6	NECK SEAL	PTFE-Teflon
7	THROAT PRESSURE	PTFE-Teflon
8	WASHER	Ck 70
9	COUNTER NUT	5.6.
10	STOP BAR	St 42
11	HANDLE	St 37
12	SPINDL O-RING	NBR 70
13	BODY O-RING	NBR 70

PRODUCT



DIMENSIONS

DN	INCH	L mm	KB mm	h mm	f mm	D mm	b mm	K mm	HOLE adet	N mm	F mm	WEIGHT kg
DN 15	1/2"	65	150	80	2	95	14	65	4	14	46	
DN 20	3/4"	65	150	85	2	105	16	75	4	14	56	
DN 25	1"	65	185	90	3	115	16	85	4	14	65	
DN 32	1 1/4"	65	240	100	3	140	18	100	4	19	76	
DN 40	1 1/2"	80	280	120	3	150	18	110	4	19	84	
DN 50	2"	83	280	125	3	165	20	125	4	19	99	
DN 65	2 1/2"	105	330	150	3	185	20	145	4	19	118	
DN 80	3"	121	400	160	3	200	22	160	8	19	132	
DN 100	4"	152	460	175	3	220	24	180	8	19	156	
DN 125	5"	196	460	200	3	250	26	210	8	19	184	
DN 150	6"	236	670	265	3	285	26	240	8	23	211	
DN 200	8"	315	750	325	4	340	26	295	12	23	266	

DESIGN TS 3148	FACE TO FACE EN 558	FLANGE CONNECTION EN 1092-2	TEST EN 12266-1	WORKING TEMPERATURE -20 °C / +180 °C
--------------------------	-------------------------------	---------------------------------------	---------------------------	--

APPLICATIONS



WATER

HOT WATER



COMPRESSED AIR



INDUSTRIAL APPLICATIONS

CERTIFICATES



Dimensions are in mm. Within the relevant standards; we reserve the right to change the design and construction.