

NATURALGAS THREADED BALL VALVE

CARBON STEEL

Product Group Code : **GK 1070 NPT** Pressure Class : **CLASS 800**

PRODUCT FEATURES	NPT THREADED CONNECTION	FULL BORE	3 PIECE

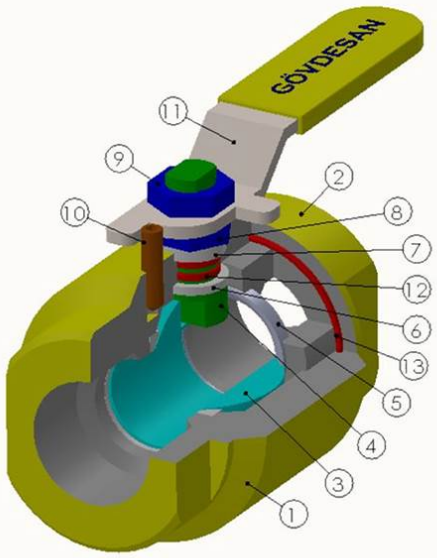

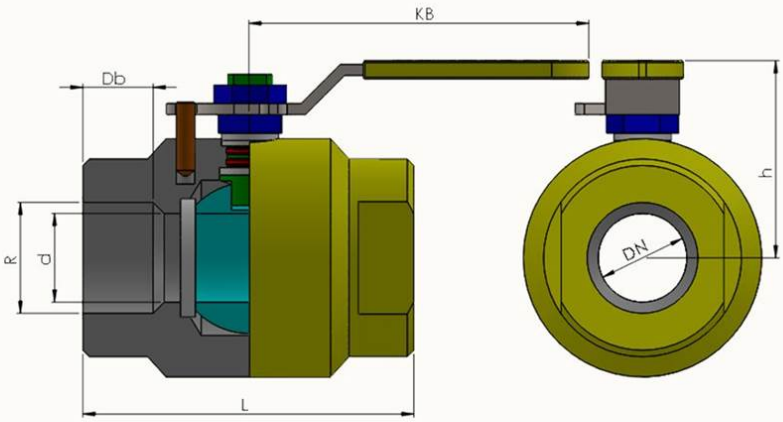

PARTS / MATERIALS

NO	PART NAME	MATERIAL
1	BODY	ASTM A 105
2	COVER	ASTM A 105
3	BALL	AISI 420
4	STEM	CK 45 + GAL.
5	BALL SEAL	PTFE-Teflon
6	NECK SEAL	PTFE-Teflon
7	THROAT PRESSURE	PTFE-Teflon
8	BOWL WASHER	Ck 70
9	COUNTER NUT	5.6.
10	STUD BOLT	8.8
11	NUT	8.8
12	STOPPING PIM	St 42
13	HANDLE	St 37
14	SPINDL O-RİNG	VITON
15	BODY O-RING	VITON

PRODUCT



DIMENSIONS

DN	INCH	L mm	KB mm	h mm	R inch	d mm	Db mm	WEIGHT kg
DN 15	1/2"	75	125	55	1/2"	15	16	0,85
DN 20	3/4"	80	125	60	3/4"	20	16	1,4
DN 25	1"	90	135	80	1"	25	20	1,55

DESIGN	FACE-TO-FACE	DİŞLİ BAĞLANTISI	TEST	OPERATING TEMPERATURE
API 6D 25. ED.	ASME B16.10	EN 10226-1	EN 12266-1	-20 °C / +180 °C

APPLICATIONS

NATURAL GAS | OIL | LPG | FUEL-OIL | COMPRESSED AIR

CERTIFICATES

CE 0408 | TSE TS EN 331 | GAZBIR-GAZMER | FIRE SAFETY | ISO 9001 | ISO 14001 | ISO 45001 | ISO 10002

Dimensions are in mm. Within the relevant standards; we reserve the right to change the design and construction.

www.govdesan.com | info@govdesan.com